


MVSP25x-5,08-H euroclamp

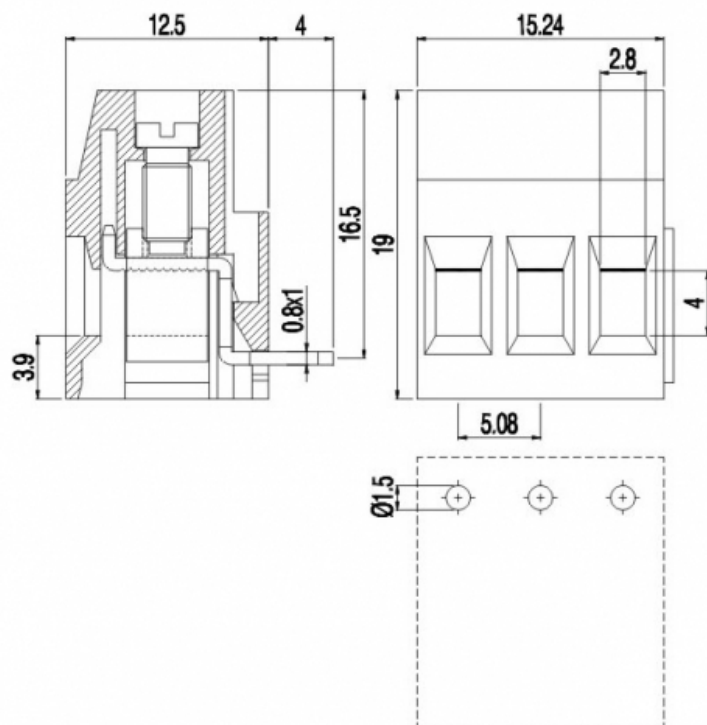

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	19,00 mm
housing depth:	12.5 mm
dimensional class:	medium
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.8 × 4 mm
wire stripping:	max 9.5 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	0.8 Nm / 7.2 in.lbs

APPROVALS DATA



EN 60998-1
current: 24A
voltage: 450V
wire section: 2.5mm²
torque: 0.8Nm
FILE: CA02.00599



-
-
-
-
-



UL 1059
18A factory / 15A field
300V
14÷30AWG
4.5Lb-in
E178356

MATERIALS

AVAILABLE COLOURS

housing: PA - UL 94 V0
 screw: Galvanized steel
 clamp/spring: Nickeled copper alloy
 terminal: Tin-plated copper alloy

other colours:  (STD)       upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MVSP252-5,08-H	N/A	N/A	N/A
3	MVSP253-5,08-H	N/A	N/A	N/A
..	MVSP25..-5,08-H	N/A	N/A	N/A