


MBES15x-5,08-V euroclamp

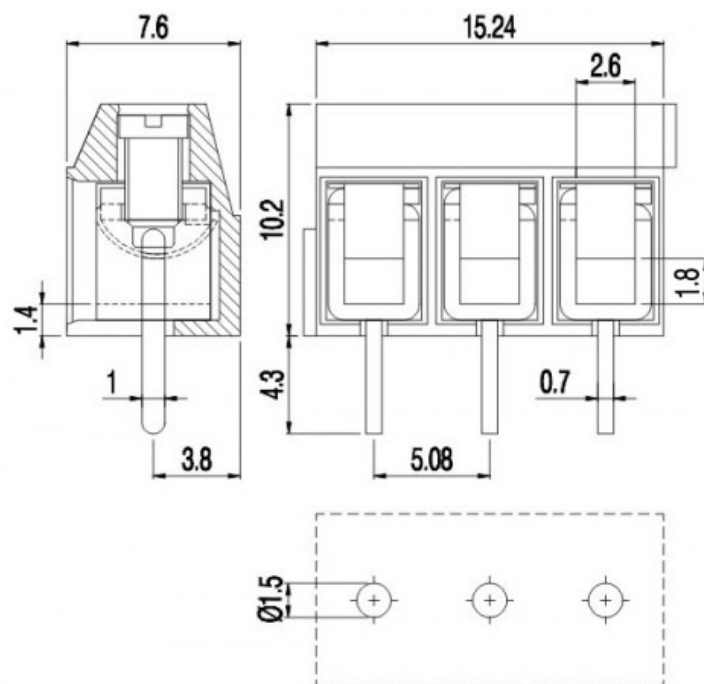

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	10,20 mm
housing depth:	7.6 mm
dimensional class:	slow
wire section:	1.5 mm ² / 16 AWG
clamp opening size:	2.6 × 2 mm
wire stripping:	max 7 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	17.5A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M2.5
max. torque:	0.4 Nm / 3.6 in.lbs

APPROVALS DATA



EN 60998-1



-



UL 1059

17.5A factory / 10A field

current:	17.5A
voltage:	250V
wire section:	1.5mm ²
torque:	0.4Nm
FILE:	EP151

-

-

-

-

-

-

300V

16÷30AWG

3.6Lb-in

E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel

AVAILABLE COLOURS



clamp/spring:	Tin-plated copper alloy	other colours:	upon request
terminal:	Tin-plated copper alloy		

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MBES152-5,08-V	N/A	N/A	N/A
3	MBES153-5,08-V	N/A	N/A	N/A
4	MBES154-5,08-V	N/A	N/A	N/A