


MVSP25x-5,08-V euroclamp

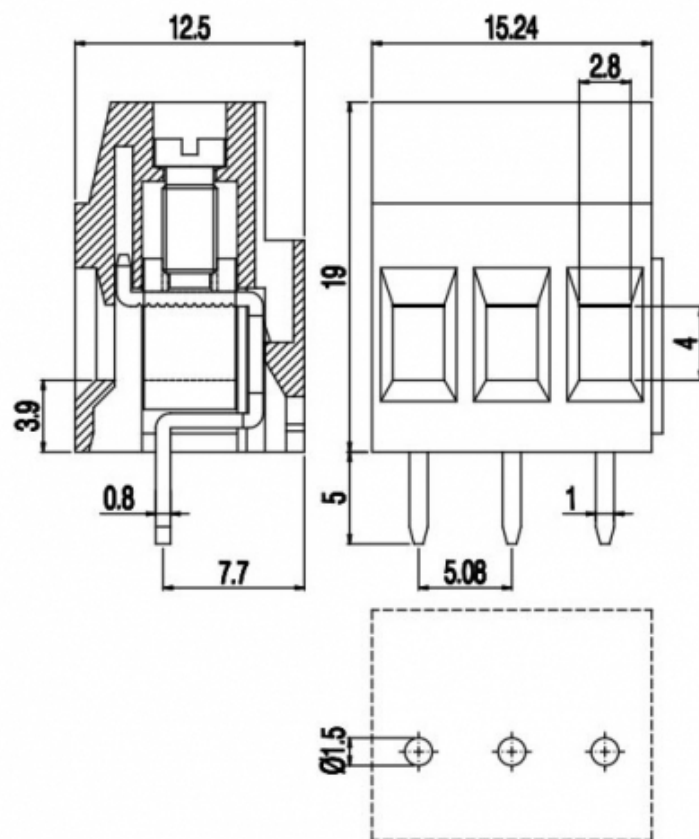

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	19,00 mm
housing depth:	12.5 mm
dimensional class:	medium
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.8 × 4 mm
wire stripping:	max 9.5 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	0.8 Nm / 7.2 in.lbs

APPROVALS DATA



EN 60998-1

current:	24A
voltage:	450V
wire section:	2.5mm ²
torque:	0.8Nm
FILE:	CA02.00599



-

-

-

-

-

-



UL 1059

18A factory / 15A field

300V

14÷30AWG

4.5Lb-in

E178356

MATERIALS

housing: PA - UL 94 V0
screw: Galvanized steel
clamp/spring: Nickeled copper alloy
terminal: Tin-plated copper alloy

AVAILABLE COLOURS



other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MVSP252-5,08-V	N/A	N/A	N/A
3	MVSP253-5,08-V	N/A	N/A	N/A
..	MVSP25..-5,08-V	N/A	N/A	N/A