
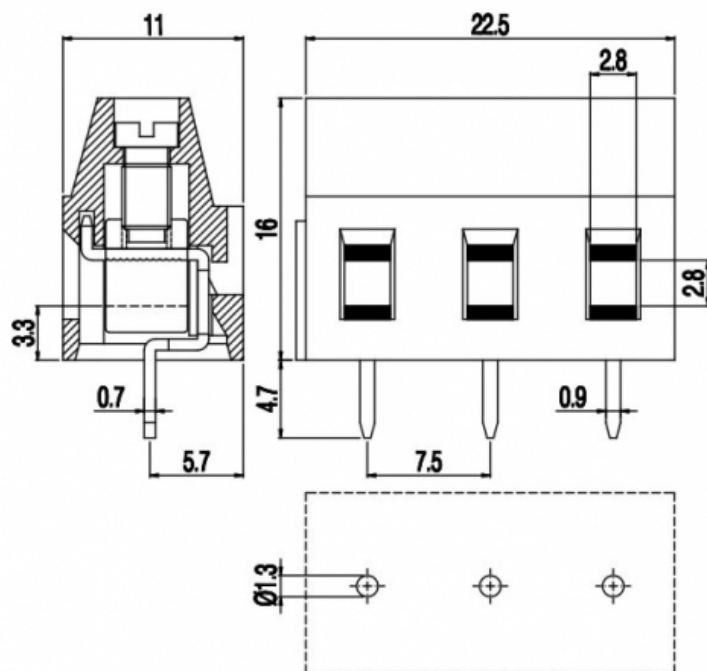


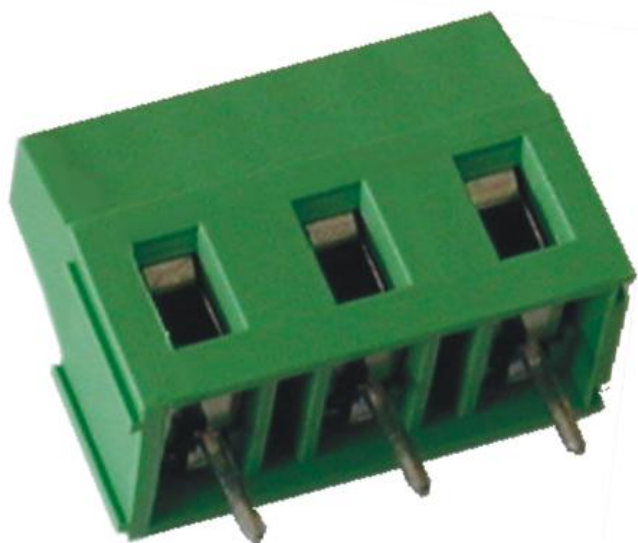

## GENERAL INFORMATION

|                        |                              |
|------------------------|------------------------------|
| pitch:                 | 7,5 mm                       |
| housing height:        | 16,00 mm                     |
| housing depth:         | 11 mm                        |
| dimensional class:     | medium                       |
| wire section:          | 2.5 mm <sup>2</sup> / 14 AWG |
| clamp opening size:    | 2.8 × 2.8 mm                 |
| wire stripping:        | max 8 mm                     |
| operating temperature: | -40°C ÷ +130°C               |

## ELECTRICAL CHARACTERISTICS

|               |             |
|---------------|-------------|
| current:      | 16A         |
| voltage:      | 750V        |
| test voltage: | 3 kVrms/60s |

## MECHANICAL CHARACTERISTICS

|              |                     |
|--------------|---------------------|
| screw:       | M3                  |
| max. torque: | 0.5 Nm / 4.5 in.lbs |

## APPROVALS DATA



EN 60998-1

|               |                    |
|---------------|--------------------|
| current:      | 16A                |
| voltage:      | 750V               |
| wire section: | 2.5mm <sup>2</sup> |
| torque:       | 0.5Nm              |
| FILE:         | EP149              |



EN 60998-1

|                    |
|--------------------|
| 16A                |
| 750V               |
| 2.5mm <sup>2</sup> |
| 0.5Nm              |
| 40023956           |



UL 1059

|                         |
|-------------------------|
| 16A factory / 15A field |
| 300V                    |
| 14÷30AWG                |
| 4.5Lb-in                |
| E178356                 |

## MATERIALS

|               |                         |
|---------------|-------------------------|
| housing:      | PA - UL 94 V0           |
| screw:        | Galvanized steel        |
| clamp/spring: | Nickeled copper alloy   |
| terminal:     | Tin-plated copper alloy |

## AVAILABLE COLOURS



other colours: upon request

| poles | P/N          | pcs/pack | W [Kg]* | W [Kg]* |
|-------|--------------|----------|---------|---------|
| 2     | MV272-7,5-V  | N/A      | N/A     | N/A     |
| 3     | MV273-7,5-V  | N/A      | N/A     | N/A     |
| ..    | MV27..-7,5-V | N/A      | N/A     | N/A     |