


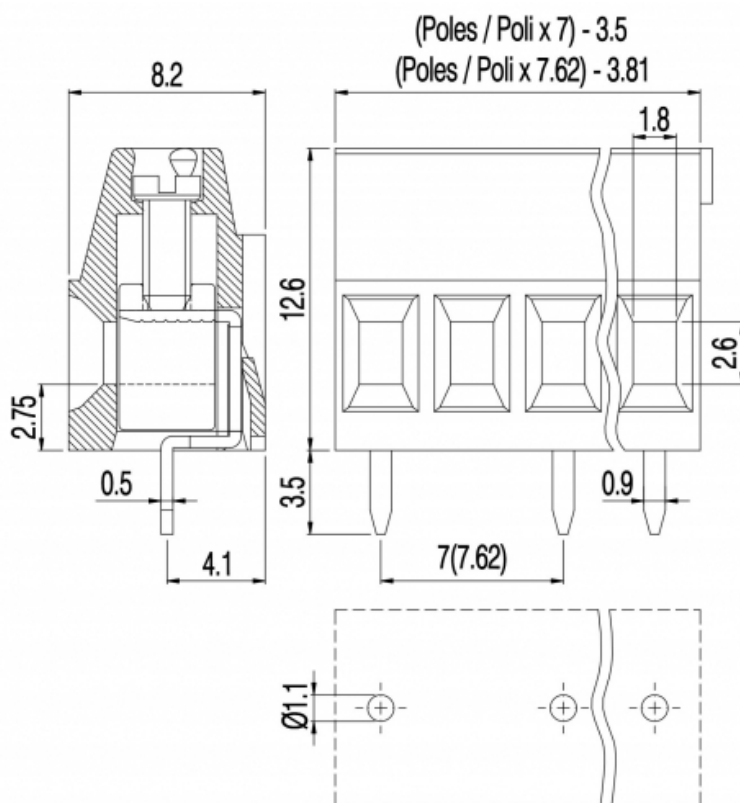

GENERAL INFORMATION

pitch:	7,62 mm
housing height:	12,60 mm
housing depth:	8.2 mm
dimensional class:	slow
wire section:	1.5 mm ² / 16 AWG
clamp opening size:	1.8 × 2.6 mm
wire stripping:	max 6 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	13,5A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M2
max. torque:	0.2 Nm / 1.8 in.lbs

APPROVALS DATA



EN 60998-1

current:	13.5A
voltage:	450V
wire section:	1.0mm ²
torque:	0.2Nm
FILE:	CA02.04718



-
-
-
-
-



UL 1059
12A factory / 10A field
300V
16÷30AWG
1.8Lb-in
E178356

MATERIALS

housing:	PA - UL 94 V0
----------	---------------

AVAILABLE COLOURS

screw:
 clamp/spring:
 terminal:

Galvanized steel
 Tin-plated copper alloy
 Tin-plated copper alloy

GN^(STD)

GY

BK

BL

RD

YL

OG

other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
1	MVS131-7,62-V	N/A	N/A	N/A
2	MVS132-7,62-V	N/A	N/A	N/A
3	MVS133-7,62-V	N/A	N/A	N/A
4	MVS134-7,62-V	N/A	N/A	N/A
5	MVS135-7,62-V	N/A	N/A	N/A
6	MVS136-7,62-V	N/A	N/A	N/A
..	MVS13..-7,62-V	N/A	N/A	N/A