
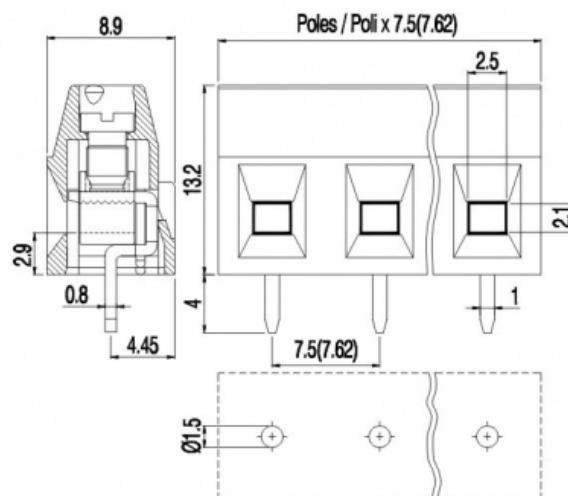


MVS17x-7,62-V-L euroclamp

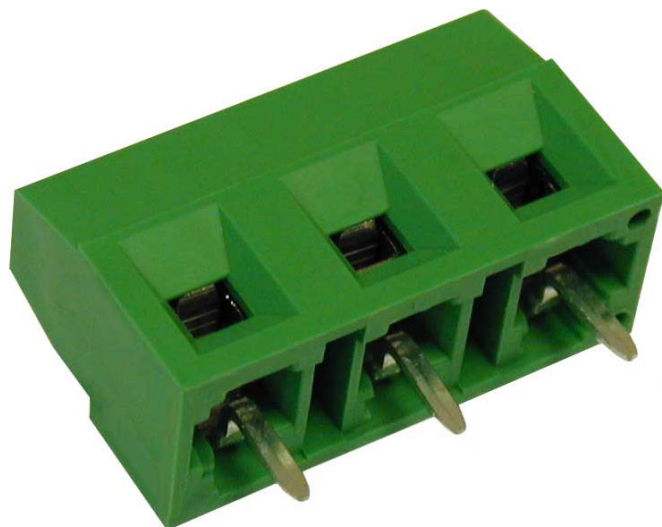

Version with antirotation pegs is available on 2 poles connections.
Disponibile per connessioni a 2 poli versioni con perni antitorsione.

GENERAL INFORMATION

pitch:	7,62 mm
housing height:	13,20 mm
housing depth:	8.9 mm
dimensional class:	slow
wire section:	1.5 mm ² / 16 AWG
clamp opening size:	2.5 × 2.1 mm
wire stripping:	max 7 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	17.5A
voltage:	750V
test voltage:	3 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	0.5 Nm / 4.5 in.lbs

APPROVALS DATA



EN 60998-1



-



UL 1059

17.5A factory / 10A field

current:	17.5A
voltage:	750V
wire section:	1.5mm ²
torque:	0.5Nm
FILE:	CA02.00598

-

-

-

-

-

300V

16÷30AWG

4.5Lb-in

E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel
clamp/spring:	Nickeled copper alloy
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS



other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MVS172-7,62-V-L	N/A	N/A	N/A
3	MVS173-7,62-V-L	N/A	N/A	N/A
4	MVS174-7,62-V-L	N/A	N/A	N/A
5	MVS175-7,62-V-L	N/A	N/A	N/A
6	MVS176-7,62-V-L	N/A	N/A	N/A
7	MVS177-7,62-V-L	N/A	N/A	N/A
8	MVS178-7,62-V-L	N/A	N/A	N/A
9	MVS179-7,62-V-L	N/A	N/A	N/A
10	MVS1710-7,62-V-L	N/A	N/A	N/A
11	MVS1711-7,62-V-L	N/A	N/A	N/A
12	MVS1712-7,62-V-L	N/A	N/A	N/A