
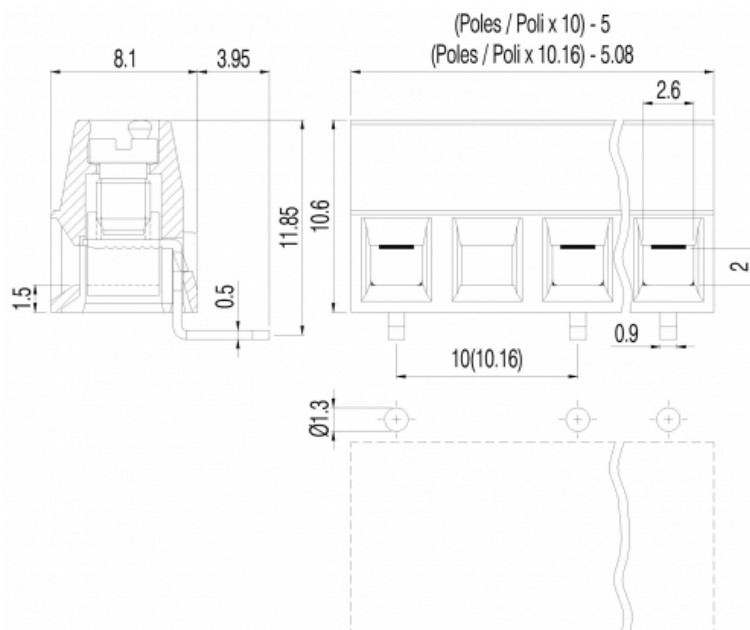


# MV15x-10,16-H-L

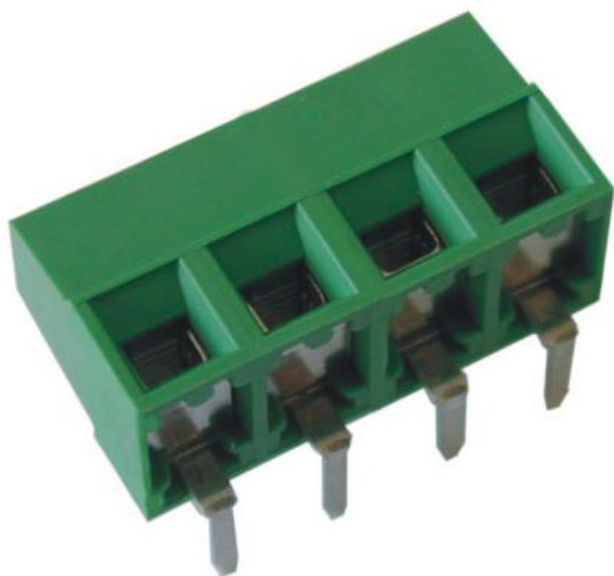

## GENERAL INFORMATION

|                        |                              |
|------------------------|------------------------------|
| pitch:                 | 10,16 mm                     |
| housing height:        | 10,60 mm                     |
| housing depth:         | 8.1 mm                       |
| dimensional class:     | slow                         |
| wire section:          | 1.5 mm <sup>2</sup> / 16 AWG |
| clamp opening size:    | 2.6 × 2 mm                   |
| wire stripping:        | max 6 mm                     |
| operating temperature: | -40°C ÷ +130°C               |

## ELECTRICAL CHARACTERISTICS

|               |             |
|---------------|-------------|
| current:      | 13.5A       |
| voltage:      | 750V        |
| test voltage: | 3 kVrms/60s |

## MECHANICAL CHARACTERISTICS

|              |                     |
|--------------|---------------------|
| screw:       | M3                  |
| max. torque: | 0.5 Nm / 4.5 in.lbs |

## APPROVALS DATA



EN 60998-1



-



UL 1059

13.5A factory / 10A field

current: 13.5A

-

voltage: 750V

-

wire section: 1.5mm<sup>2</sup>

-

torque: 0.5Nm

-

FILE: EQ202

-

600V

16÷30AWG

4.5Lb-in

E178356

## MATERIALS

|               |                         |
|---------------|-------------------------|
| housing:      | PA - UL 94 V0           |
| screw:        | Galvanized steel        |
| clamp/spring: | Nickel copper alloy     |
| terminal:     | Tin-plated copper alloy |

## AVAILABLE COLOURS



other colours: upon request

| poles | P/N             | pcs/pack | W [Kg]* | W [Kg]* |
|-------|-----------------|----------|---------|---------|
| 2     | MV152-10,16-H-L | N/A      | N/A     | N/A     |
| 3     | MV153-10,16-H-L | N/A      | N/A     | N/A     |
| 4     | MV154-10,16-H-L | N/A      | N/A     | N/A     |
| 5     | MV155-10,16-H-L | N/A      | N/A     | N/A     |
| 6     | MV156-10,16-H-L | N/A      | N/A     | N/A     |