


MV10x-10,16-V-A euroclamp

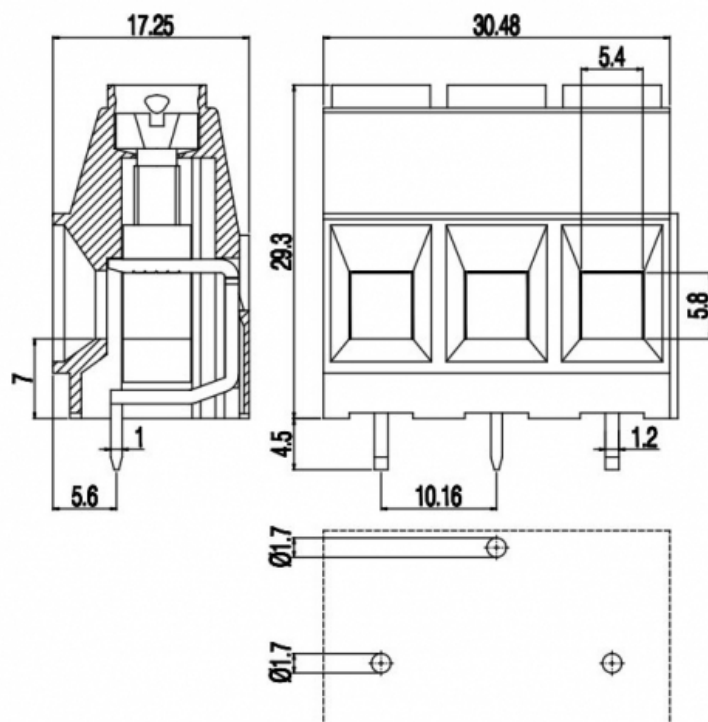

GENERAL INFORMATION

pitch:	10,16 mm
housing height:	29,30 mm
housing depth:	17.25 mm
dimensional class:	high
wire section:	10 mm ² / 8 AWG
clamp opening size:	5.4 × 5.8 mm
wire stripping:	max 15 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	42A
voltage:	750V
test voltage:	3 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M4
max. torque:	1.2 Nm / 10.8 in.lbs

APPROVALS DATA



-



EN 60998-1



UL 1059

current:	-
voltage:	-
wire section:	-
torque:	-
FILE:	-

49A
750V
16mm ²
1.5Nm
40034945

42A factory / 42A field
300V
8÷30AWG
10.8Lb-in
E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel

AVAILABLE COLOURS



clamp/spring:	Nickeled copper alloy	other colours:	upon request
terminal:	Tin-plated copper alloy		

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MV102-10,16-V-A	N/A	N/A	N/A
3	MV103-10,16-V-A	N/A	N/A	N/A
..	MV10..-10,16-V-A	N/A	N/A	N/A