
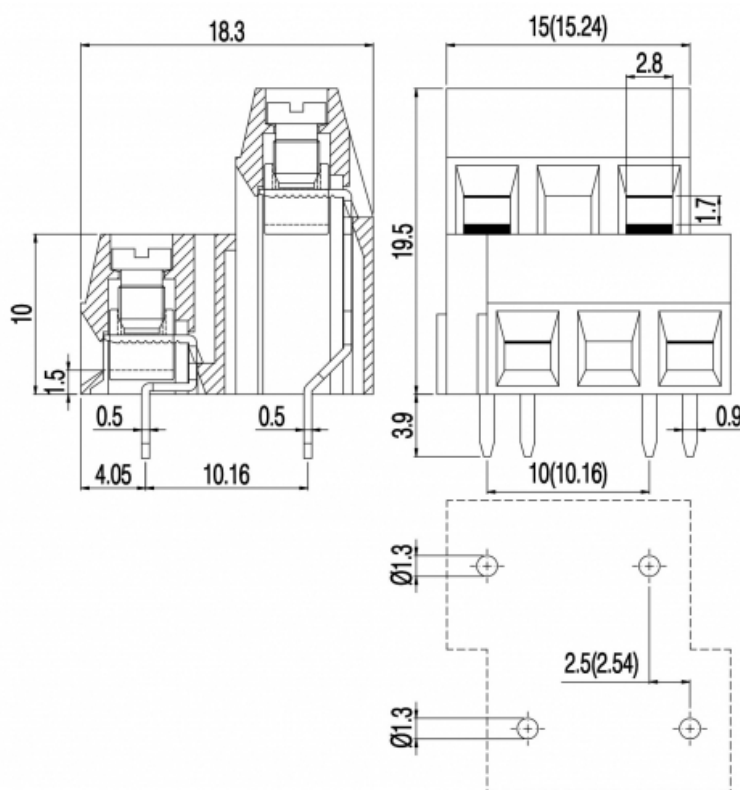


MVD15x-10,16-V

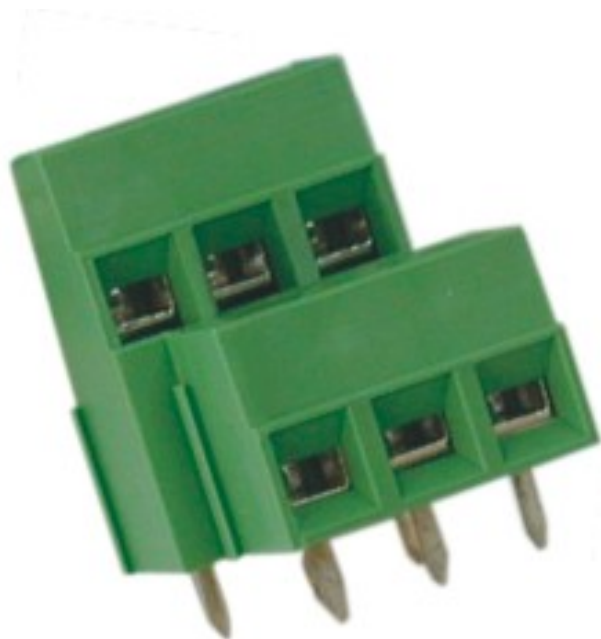

GENERAL INFORMATION

pitch:	10,16 mm
housing height:	16,50 mm
housing depth:	18.3 mm
dimensional class:	slow
wire section:	1.5 mm ² / 16 AWG
clamp opening size:	2.5 × 1.7 mm
wire stripping:	max 6 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	13.5A
voltage:	750V
test voltage:	3 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	0.5 Nm / 4.5 in.lbs

APPROVALS DATA



	-	-	UL 1059
current:	-	-	13.5A factory / 10A field
voltage:	-	-	600V
wire section:	-	-	16÷30AWG
torque:	-	-	4.5Lb-in
FILE:	-	-	E178356

MATERIALS

housing:	PA - UL 94 V0
----------	---------------

AVAILABLE COLOURS

screw:
clamp/spring:
terminal:

Galvanized steel
Nickeled copper alloy
Tin-plated copper alloy



other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
1	MVD151-10,16-V	N/A	N/A	N/A
2	MVD152-10,16-V	N/A	N/A	N/A
..	MVD15..-10,16-V	N/A	N/A	N/A