
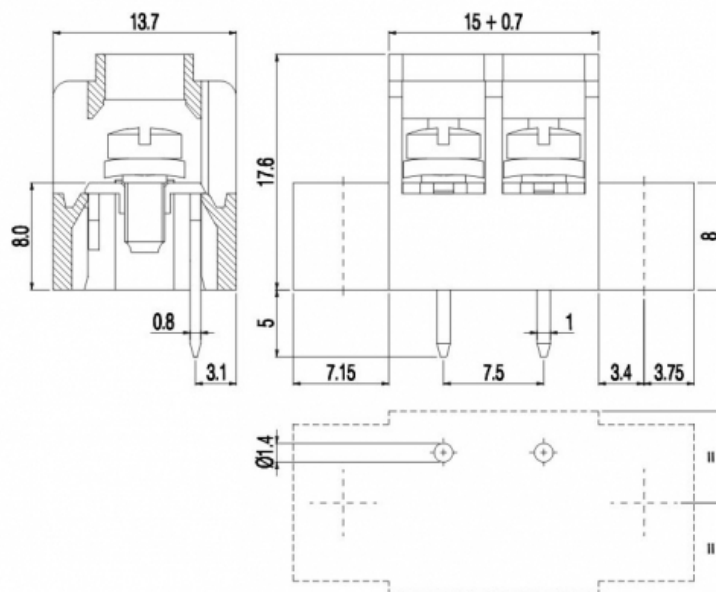


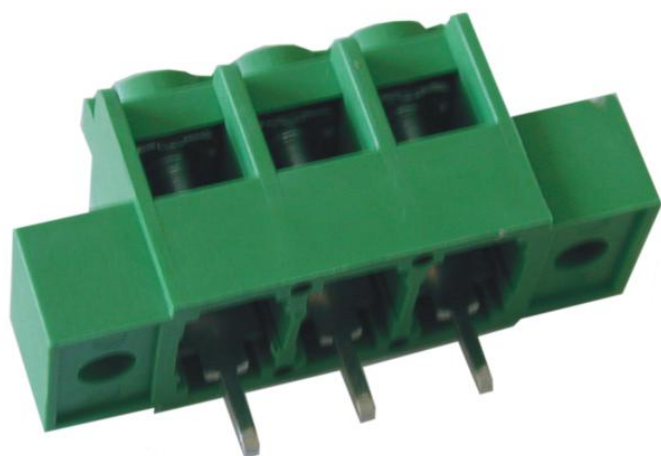

## GENERAL INFORMATION

|                        |                                  |
|------------------------|----------------------------------|
| pitch:                 | 7,5 mm                           |
| housing height:        | 17,60 mm                         |
| housing depth:         | 13.7 mm                          |
| dimensional class:     | slow                             |
| wire section:          | 2x2.5 mm <sup>2</sup> / 2x14 AWG |
| clamp opening size:    |                                  |
| wire stripping:        | max 9 mm                         |
| operating temperature: | -40°C ÷ +130°C                   |

## ELECTRICAL CHARACTERISTICS

|               |               |
|---------------|---------------|
| current:      | 24A           |
| voltage:      | 450V          |
| test voltage: | 2.5 kVrms/60s |

## MECHANICAL CHARACTERISTICS

|              |                     |
|--------------|---------------------|
| screw:       | M3                  |
| max. torque: | 0.5 Nm / 4.5 in.lbs |

## APPROVALS DATA



current:  
voltage:  
wire section:  
torque:  
FILE:

-  
-  
-  
-  
-

-  
-  
-  
-  
-

UL 1059  
20A factory / 15A field  
300V  
30÷14AWG  
4.5Lb-in  
E178356

## MATERIALS

|               |                         |
|---------------|-------------------------|
| housing:      | PA - UL 94 V0           |
| screw:        | Galvanized steel        |
| clamp/spring: | Galvanized iron         |
| terminal:     | Tin-plated copper alloy |

## AVAILABLE COLOURS



other colours: upon request

poles

P/N

pcs/pack

W [Kg]\*

W [Kg]\*

|    |                |     |     |     |
|----|----------------|-----|-----|-----|
| 2  | MT172-7,5-VCK  | N/A | N/A | N/A |
| 3  | MT173-7,5-VCK  | N/A | N/A | N/A |
| .. | MT17..-7,5-VCK | N/A | N/A | N/A |