
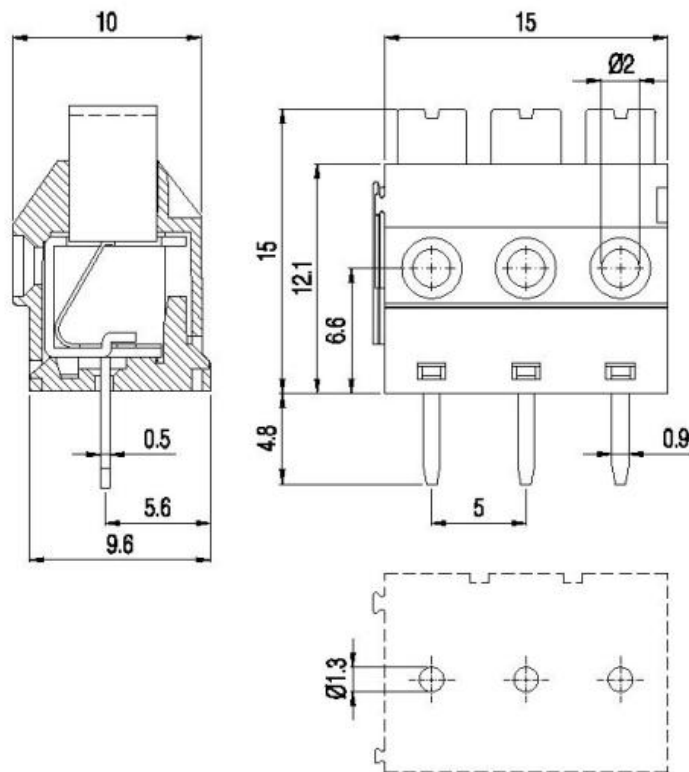


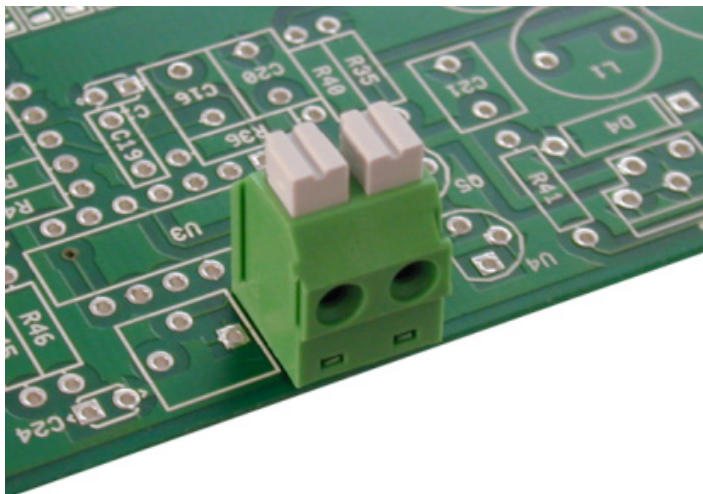

GENERAL INFORMATION

pitch:	5 mm
housing height:	15,00 mm
housing depth:	10 mm
dimensional class:	slow
wire section:	1.5 mm ² / 16 AWG
clamp opening size:	1.5 × 1.5 mm
wire stripping:	max 7 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	12A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

spring releasing:	0.6 x 3.5mm
-	-

APPROVALS DATA



current:	-
voltage:	-
FILE:	-

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	

AVAILABLE COLOURS



other colours: upon request

terminal:

Tin-plated copper alloy

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MVEM502-5-V	N/A	N/A	N/A
3	MVEM503-5-V	N/A	N/A	N/A
..	MVEM50..-5-V	N/A	N/A	N/A