
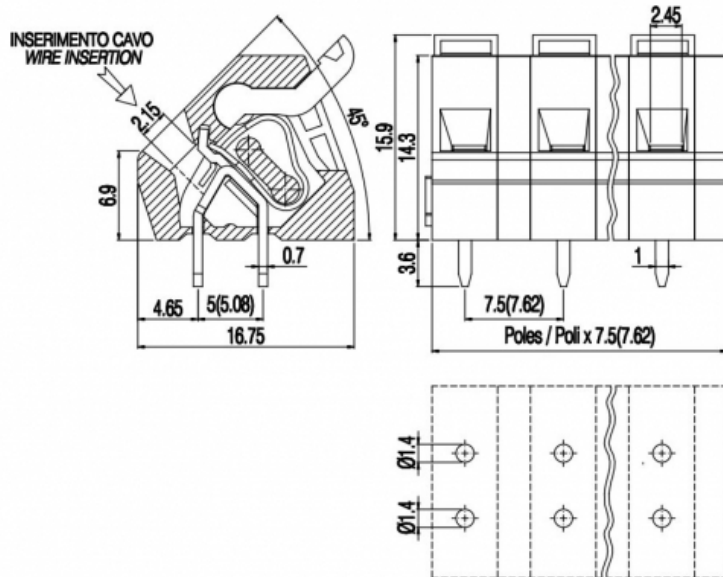


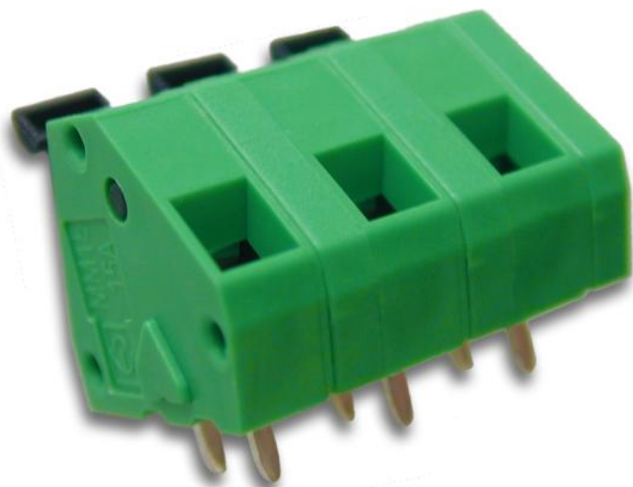

GENERAL INFORMATION

pitch:	7,62 mm
housing height:	14,30 mm
housing depth:	16.75 mm
dimensional class:	slow
wire section:	1.5 mm ² / 16 AWG
clamp opening size:	2.45 × 2.45 mm
wire stripping:	max 9 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	16A
voltage:	750V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

spring releasing:	0.6 x 3.5mm
-	-

APPROVALS DATA



current:	-
voltage:	-
FILE:	-

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS



other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
01	MG101-7,62-P	N/A	N/A	N/A
..	MG1..-7,62-P	N/A	N/A	N/A