

AUDIBLE & VISUAL ALARMS

PANEL MOUNTING PIEZO AUDIBLE ALARMS

PAA SERIES




- Extensive range
- Suit all applications
- Transducers also available in same case sizes
- High Quality High Output
- Contact Sales Office if the device to suit your application is not listed

Features

PAA134	PAA145	PAA156	PAA167	PAA178	PAA123	PAA189	PAA190	PAA191	PAA200	PAA210	PAA220
Economy High Output	Economy 24VDC	Miniature	General Purpose	High Output	General Purpose	Standard mid range	General Purpose	Standard Pulsating model	High Output Piezo alarm	High Output Pulsating Piezo Alarm	High/Low Pulse Sound

Dimensions

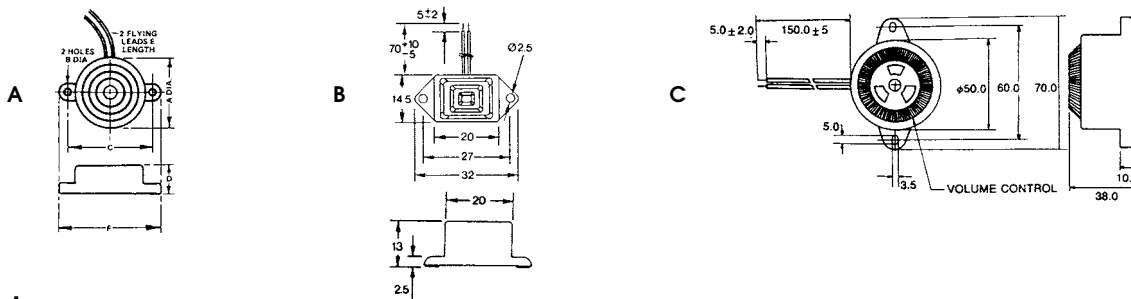

Dimension Data in mm

Product Code	A Overall Diameter	B Fixing hole diameter	C Centre	D Depth	E Lead Length	F Fixing Feet
PAA134	29.50	3.50	34.00	16.50	100.00	42.00
PAA145	22.00	2.30	26.50	13.00	70.00	32.00
PAA156	28.00	3.50	34.00	20.50	100.00	40.00
PAA167	24.00	2.20	29.00	14.50	110.00	34.00
PAA178	32.00	3.50	38.00	13.50	140.00	44.00
PAA123			See Diagram B			
PAA189	34.00	3.00	45.00	14.50	140.00	55.00
PAA190	41.80	3.40	50.00	16.00	140.00	60.00
PAA191	41.80	3.40	50.00	16.00	140.00	60.00
PAA200			See Diagram C			
PAA210			See Diagram C			
PAA220			See Diagram C			

Technical Data

Product Code	Sound output dB@ 30cm	Operating Range VDC	Frequency Hz	Current Consumption mA	Temperature Range °C	Tone
PAA134	90	2 - 16	3800	15	-20 to +60	Constant
PAA145	80	6 - 28	3400	10	-20 to +60	Constant
PAA156	85	3 - 28	2800	20	-20 to +60	Constant
PAA167	90	3 - 20	3100	9	-20 to +60	Constant
PAA178	93	3 - 20	3500	8	-20 to +60	Constant
PAA123	95	6 - 16	3400	8	-20 to +60	Constant
PAA189	90	3 - 28	3500	6	-20 to +60	Constant
PAA190	90	3 - 28	2800	9	-20 to +60	Constant
PAA191	90	3 - 28	3500	6	-20 to +60	Pulsating
PAA200	105	2 - 16	2500	45	-20 to +60	Constant
PAA210	105	3 - 16	2500	45	-20 to +60	Pulsating
PAA220	105	6 - 16	2500	70	-20 to +60	Warble