
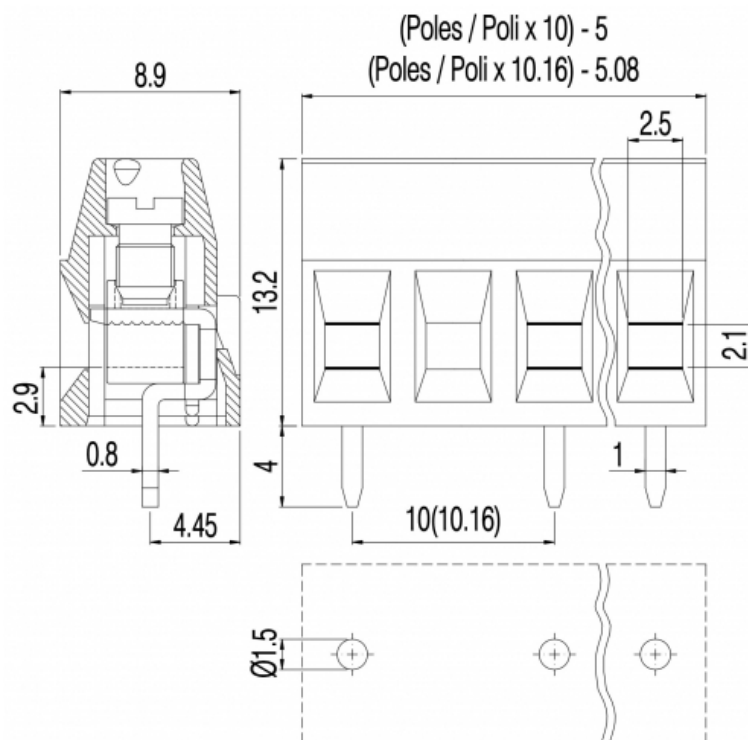


# MVS15x-10,16-V-L

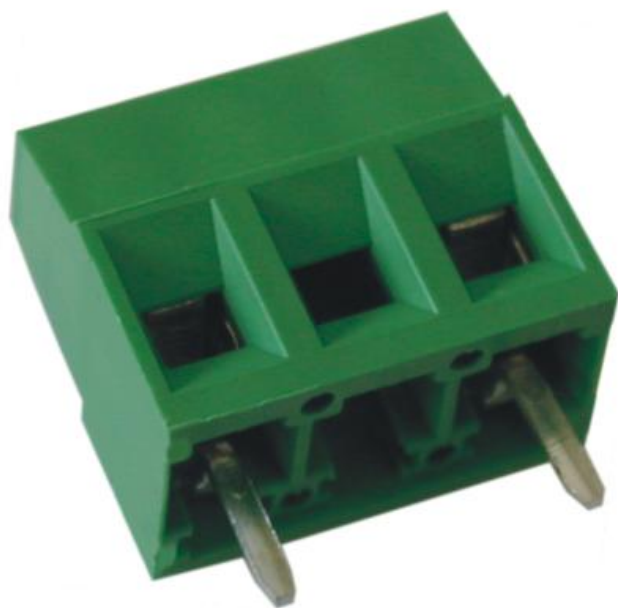

## GENERAL INFORMATION

|                        |                              |
|------------------------|------------------------------|
| pitch:                 | 10,16 mm                     |
| housing height:        | 13,50 mm                     |
| housing depth:         | 8.9 mm                       |
| dimensional class:     | slow                         |
| wire section:          | 1.5 mm <sup>2</sup> / 16 AWG |
| clamp opening size:    | 2.5 × 3.1 mm                 |
| wire stripping:        | max 7 mm                     |
| operating temperature: | -40°C ÷ +130°C               |

## ELECTRICAL CHARACTERISTICS

|               |             |
|---------------|-------------|
| current:      | 17.5A       |
| voltage:      | 750V        |
| test voltage: | 3 kVrms/60s |

## MECHANICAL CHARACTERISTICS

|              |                     |
|--------------|---------------------|
| screw:       | M3                  |
| max. torque: | 0.5 Nm / 4.5 in.lbs |

## APPROVALS DATA



EN 60998-1



-



UL 1059

17.5A factory / 10A field

|               |                    |
|---------------|--------------------|
| current:      | 17.5A              |
| voltage:      | 750V               |
| wire section: | 1.5mm <sup>2</sup> |
| torque:       | 0.5Nm              |
| FILE:         | CA02.00598         |

-

-

-

-

-

-

-

## MATERIALS

|          |                  |
|----------|------------------|
| housing: | PA - UL 94 V0    |
| screw:   | Galvanized steel |

## AVAILABLE COLOURS



clamp/spring:                      Nickeled copper alloy      other colours:                      upon request  
terminal:                              Tin-plated copper alloy

| poles | P/N              | pcs/pack | W [Kg]* | W [Kg]* |
|-------|------------------|----------|---------|---------|
| 2     | MVS152-10,16-V-L | N/A      | N/A     | N/A     |
| 3     | MVS153-10,16-V-L | N/A      | N/A     | N/A     |
| 4     | MVS154-10,16-V-L | N/A      | N/A     | N/A     |
| 5     | MVS155-10,16-V-L | N/A      | N/A     | N/A     |
| 6     | MVS156-10,16-V-L | N/A      | N/A     | N/A     |